




# GI-200-X

Tag: \_\_\_\_\_

## Large Capacity Grease Interceptor Deep Rough-in Flush with Floor Installation

**SPECIFICATION:** Watts Drainage Products GI-200-X epoxy coated inside and outside fabricated steel grease interceptor with flow rating of 100 to 600 GPM and grease capacity of 200 to 1200 LBS. Unit shall include removable baffles, code approved deep seal trap, cover securing bolt, stainless steel calibrated orifice plate and non-skid removable cover.

Order Code: GI-  - X -  -

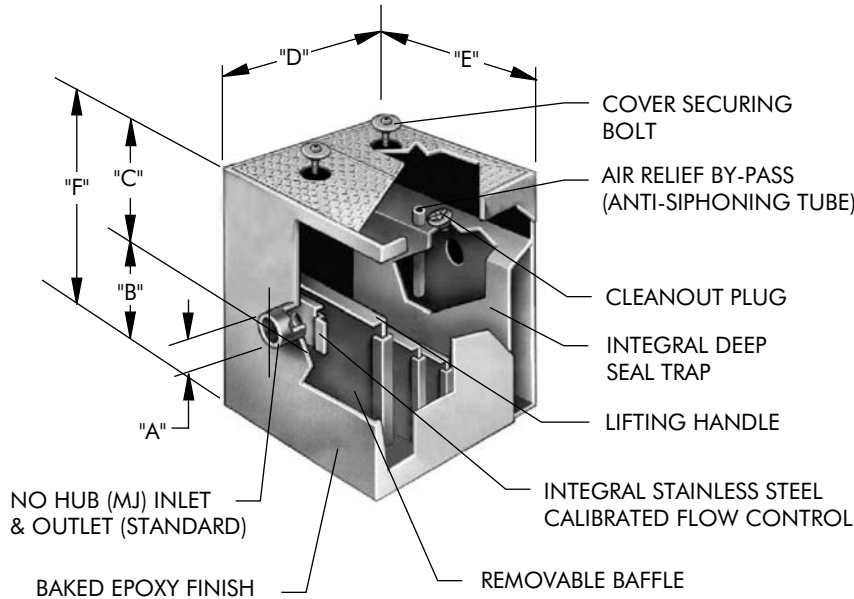

NOTE: "C" dimension please specify. Available in increments of 3"(75). GI-210-X two piece cover. GI-215-X to GI-260-X three piece cover.

### Ex. GI-220-X-B

Flow Rate (Select One)		
Suffix	Description	
210	100 GPM	<input type="checkbox"/>
215	150 GPM	<input type="checkbox"/>
220	200 GPM	<input type="checkbox"/>
225	250 GPM	<input type="checkbox"/>
230	300 GPM	<input type="checkbox"/>
235	350 GPM	<input type="checkbox"/>
240	400 GPM	<input type="checkbox"/>
250	500 GPM	<input type="checkbox"/>
260	600 GPM	<input type="checkbox"/>

Options (Select One or More)		
Suffix	Description	
-B	Lift Out Bucket	<input type="checkbox"/>
-DI	Dual Inlet	<input type="checkbox"/>
-E	Initial Supply of Biomix Powder 2 lbs	<input type="checkbox"/>
-F	Flange	<input type="checkbox"/>
-FC	Flange w/ Mem. Clamp	<input type="checkbox"/>
-HDC	Heavy Duty Cover	<input type="checkbox"/>
-O	Inlet & Outlet other than standard	<input type="checkbox"/>
-T	Threaded Connections	<input type="checkbox"/>
-SS	Stainless Steel	<input type="checkbox"/>
-IP	Injection Port (specify location)	<input type="checkbox"/>

Optional Inlet/Outlet Sizes (When -O is selected above)		
Suffix	Description	
-4	4"(102) Inlet/Outlet	<input type="checkbox"/>
-6	6"(152) Inlet/Outlet	<input type="checkbox"/>

\* Available in 3"(75) Increments

Cubic Capacity of Fixtures in Inches	Interceptor Catalog Number	Grease Capacity Lbs	Flow Rate GPM	A	B	C*	D	E	F	DI
				Inlet & Outlet	Base to Center	Top to Center	Length	Width	Height	Between Inlet Centres
up to 30500	GI-210-X	200	100	4"(102)	24"(610)	SPECIFY	54"(1372)	36"(914)	V	6-1/2"(165)
30501 to 46000	GI-215-X	300	150	4"(102)	29"(737)	SPECIFY	60"(1524)	38"(965)	A	6-1/2"(165)
46001 to 61000	GI-220-X	400	200	4"(102)	31"(787)	SPECIFY	69"(1753)	43"(1092)	R	6-1/2"(165)
61001 to 77000	GI-225-X	500	250	4"(102)	37"(940)	SPECIFY	74"(1880)	45"(1143)	I	6-1/2"(165)
77001 to 92000	GI-230-X	600	300	6"(152)	38"(965)	SPECIFY	76"(1930)	48"(1219)	A	9"(229)
92001 to 107000	GI-235-X	700	350	6"(152)	39"(991)	SPECIFY	79"(2007)	50"(1270)	B	9"(229)
107001 to 122000	GI-240-X	800	400	6"(152)	42"(1067)	SPECIFY	83"(2108)	55"(1397)	L	9"(229)
122001 to 154000	GI-250-X	1000	500	6"(152)	53"(1346)	SPECIFY	91"(2311)	60"(1524)	E	9"(229)
154001 to 188000	GI-260-X	1200	600	8"(203)	60"(1524)	SPECIFY	100"(2540)	72"(1829)		12"(305)

Job Name \_\_\_\_\_ Contractor \_\_\_\_\_

Job Location \_\_\_\_\_ Contractor's P.O. No. \_\_\_\_\_

Engineer \_\_\_\_\_ Representative \_\_\_\_\_

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.



CANADA: 5435 North Service Road, Burlington, ON, L7L 5H7 TEL: 905-332-6718 TOLL-FREE: 1-888-208-8927 Website: www.wattsdrainage.ca

